
OpenWrt ?? syslog-ng

??syslog-ng

□□□□□□□□

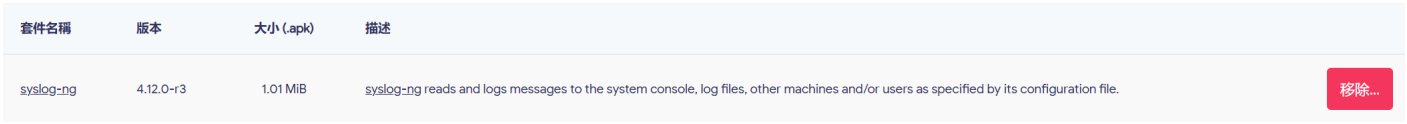

套件名稱	版本	大小 (.apk)	描述	
syslog-ng	4.12.0-r3	1.01 MiB	syslog-ng reads and logs messages to the system console, log files, other machines and/or users as specified by its configuration file.	移除...

??syslog-ng

□□ `/etc/syslog-ng.conf` □□ **source src□□ unix-dgram□□□□**

□□□□□□□□□□□□ /dev/log □□□□□□ +8

```
source src {
        internal();
        unix-dgram("/dev/log" keep-timestamp(no) time-zone("+08:00"));
};
```

??????

□□ syslog-ng□□□ 50□□□□□□□□□□□□□□□ syslog-ng□□

lrwxrwxrwx 1 root root 19 Nov 9 10:42 /etc/rc.d/S50syslog-ng -> ../init.d/syslog-ng

□□ `/etc/init.d/syslog-ng` □□ **START□□ 12**

```
START=12
```

□□□□□□□□

```
/etc/init.d/syslog-ng enable
/etc/init.d/syslog-ng start

#□□□□S50□□
rm /etc/rc.d/S50syslog-ng
```

□□□□□□□ **12**

lrwxrwxrwx 1 root root 19 Nov 9 12:27 /etc/rc.d/S12syslog-ng -> ../init.d/syslog-ng

□□ `/var/log/messages` □□□ **log**

```
root@OpenWrt:~# cat /var/log/messages
Nov  9 10:42:06 OpenWrt syslog-ng[26611]: syslog-ng starting up; version='4.12.0'
Nov  9 10:42:06 OpenWrt syslog-ng[26611]: syslog-ng shutting down; version='4.12.0'
```

□□□□ `logd` □□

```
/etc/init.d/log stop
/etc/init.d/log disable
```

openwrt logread□□□□ `/var/log/messages`

Revision #2
Created 9 November 2026 04:29:45 by Jason
Updated 9 November 2026 06:17:37 by Jason