
Synology ?? Docker ?? immich ??

> **immich□□□□□□□□□□□□□□□□ Google□□□□□□□ APP □□□□□□□□□□□□□□□**

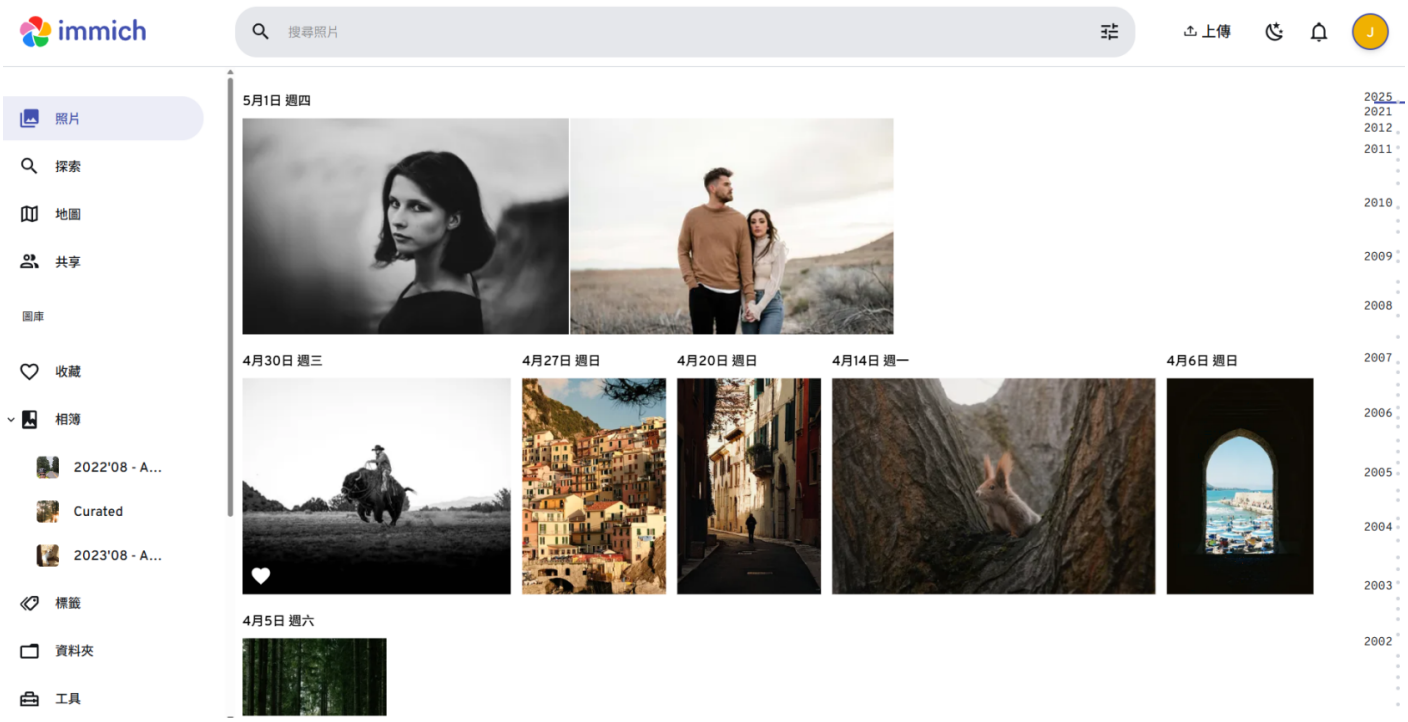

□□ Demo

????

- **DSM 7.1**

??immich

□□□□ **Portainer**□□ **docker**□□□□ `immich-app` □□□□ `library` □ `postgres` □□□



□□□□ docker-compose.yml□ .env□□

```
https://github.com/immich-app/immich/releases/latest/download/docker-compose.yml
```

```
https://github.com/immich-app/immich/releases/latest/download/example.env
```

□□□□ docker-compose.yml□ .env□□

□□ `example.env` □□□ `.env`

```
# You can find documentation for all the supported env variables at
https://docs.immich.app/install/environment-variables

# The location where your uploaded files are stored
UPLOAD_LOCATION=/volume1/docker/immich-app/library

# The location where your database files are stored. Network shares are not supported for the
database
DB_DATA_LOCATION=/volume1/docker/immich-app/postgres
```

```
# To set a timezone, uncomment the next line and change Etc/UTC to a TZ identifier from this
list: https://en.wikipedia.org/wiki/List_of_tz_database_time_zones#List
# TZ=Asia/Taipei

# The Immich version to use. You can pin this to a specific version like "v1.71.0"
IMMICH_VERSION=release

# Connection secret for postgres. You should change it to a random password
# Please use only the characters `A-Za-z0-9`, without special characters or spaces
DB_PASSWORD=postgres

# The values below this line do not need to be changed
###################################################################################
DB_USERNAME=postgres
DB_DATABASE_NAME=immich
```

- **UPLOAD_LOCATION、DB_DATA_LOCATION□□□□　　docker □□□□□□□□□**
- **TZ□□　Asia/Taipei**
- **DB_PASSWORD □□□□□□□**

□□ Portainer□□□□□　　(Stack)

□ docker-compose.yml□□□□　　Stack□□□□□□□□□□□□　　`.env`□□

```
66        # DB_STORAGE_TYPE: 'HDD'
67      volumes:
68        # Do not edit the next line. If you want to change the database storage location on your system, edit the value of DB_DATA_LOCATION in the .env
69        - ${DB_DATA_LOCATION}:/var/lib/postgresql/data
70      shm_size: 128mb
71      restart: always
72
73  volumes:
74    model-cache:
75
```



□□□□□□□□□□□□□□□□□□□□□□ `- .env` □□ `- stack.env`

环境变量

你可以在 compose 文件中使用环境变量。下面设置的环境变量值将用于 compose 文件中的替换。请注意，你也可以在 compose 文件中引用 stack.env 文件。stack.env 文件包含环境变量及其值（例如 TAG=v1.5）。

stack.env 文件操作

通过 **代码仓库** 部署时，stack.env 文件必须已经存在于 Git 仓库中。
通过 **网页编辑器**、**上传** 或 **自定义模板部署** 部署时，stack.env 文件会自动根据你下面设置的内容创建。

高级模式
切换到高级模式以复制和粘贴多个变量

name*	UPLOAD_LOCATION	value	/volume1/docker/immich-app/library
name*	DB_DATA_LOCATION	value	/volume1/docker/immich-app/postgres
name*	IMMICH_VERSION	value	release
name*	DB_PASSWORD	value	postgres
name*	DB_USERNAME	value	postgres
name*	DB_DATABASE_NAME	value	immich

+ 添加环境变量 | .env 文件加载变量 | .env

访问控制

启用访问控制

堆栈 > immich

堆栈详情

jason

堆栈 | 编辑器

此堆栈将使用 `docker compose` 部署。
您可以在 官方文档 中获取有关 Compose 文件格式的更多信息。

在此定义或粘贴您的 docker compose 文件内容 复制到剪贴板

```
23    env_file:
24      - stack.env
25    ports:
26      - '2283:2283'
27    depends_on:
28      - redis
29      - database
30    restart: always
31    healthcheck:
32      disable: false
33
34  immich-machine-learning:
35    container_name: immich_machine_learning
36    # For hardware acceleration, add one of -[armnn, cuda, rocm, openvino, rknn] to the image tag.
37    # Example tag: ${IMMICH_VERSION:-release}-cuda
38    image: ghcr.io/immich-app/immich-machine-learning:${IMMICH_VERSION:-release}
39    # extends: # uncomment this section for hardware acceleration - see https://docs.immich.app/features/ml-hardware-acceleration
40    #   file: hwaccel.ml.yml
41    #   service: cpu # set to one of [armnn, cuda, rocm, openvino, openvino-wsl, rknn] for accelerated inference - use the `-wsl` version for WSL2 where
42    volumes:
43      - model-cache:/cache
44    env_file:
45      - stack.env
46    restart: always
```

修改完成後部屬，第一次下載容器需等待一段間，所有容器成功開啟後即可登入 http://192.168.0.250:2283/初始化安裝

Revision #1
Created 9 October 2025 14:30:13 by Jason Updated 9 October 2025 15:20:35 by Jason